



MDX 400 - 84000  
Refrigerant dryers

Solid, simple, smart.  
Advanced reliability in  
compressed air.



**MARK**



## User benefits

### Simple Installation

- Light and compact design
- Easy to transport
- Easy installation that does not require any special equipment or special foundation work.

### Solid Quality

- High reliability was a key driver when developing the MDX dryer range
- First-class components that have been tested under the worst possible operating conditions
- Constant dewpoint under any load conditions when correctly sized.

### Easy Maintenance and Accessibility

- Less maintenance is required and is easier
- Reliable components that are easily accessed.
- Long service intervals

### Cost savings

- Very little maintenance required
- Low energy consumption
- Energy savings due to low pressure drops throughout the dryer system
- No compressed air waste due to intelligent automatic discharge of condensate.

## MDX Refrigerant dryer

A compressor takes humidity and contamination from the intake air, during the compression process these particles combine with the oil used in the compressor. All these impurities can cause wear and corrosion to the downstream equipment, with potential costly interruption to production, and reduction in the efficiency and service life of the equipment used.

To reduce this negative impact, a range of refrigerant dryers has been developed to ensure air quality, increase efficiency and productivity and lengthen the life span of your equipment and tools.

## The benefits of refrigerant dryers


### Clean and dry air

- Compressed air is cooled down by refrigerant gas, condensing the water in the air, allowing it to be removed.
- Protection of the air network from corrosion, rust and leakages.
- Higher final product quality.
- Increase your overall productivity
- Protection for the downstream equipment

### Typical installations


1. Compressor with after cooler
2. G filter
3. C filter

High quality air with reduced dew point  
(air purity to ISO 8573-1: class 1:4:2)

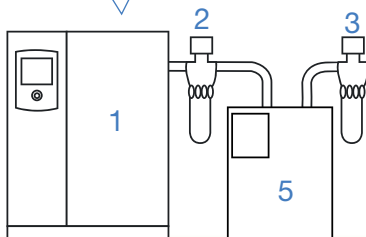

4. V filter
5. Refrigerant dryer. Vertical receiver is always recommended

High quality air with reduced dew point and oil concentration  
(air purity to ISO 8573-1: class 1:4:1)

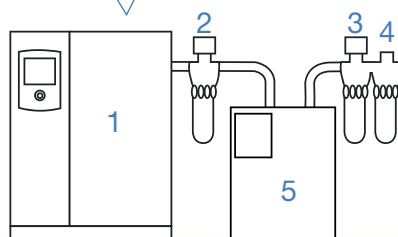

## »»» PDP Indicator

The operation of the MDX dryer is monitored by an electronic controller indicating all relevant information:



### Technical details:

- Status of the refrigerant dryer
- Status of the fan
- Dewpoint indication

### Alarm display:

- Alarm about high or low dewpoint
- Fan probe failure (MDX 1200-7700)
- Service warning

### Control panel with free contact (on request) for a:

- Remote PDP alarm (MDX 2400-84000)
- Remote high refrigerant temperature (MDX 2400-84000)
- Remote fan probe failure (MDX 2400-7700)



## »»» Intelligent capacitive drain discharge

The full refrigerant dryer range is equipped with the capacity condensate drain, a range using electronic sensors to discharge only condensate and without wasting any compressed air.

### Benefits

- ✓ Only water is discharged, no compressed air
- ✓ Energy saving
- ✓ No noise and environmental friendly

## »»» Standard features (for MDX 10000-84000)

Free contacts for a:

- Remote start/stop
- Remote general alarm
- Remote drain alarm

## »»» Available options (for MDX 400-1800)

### Bypass valve and filter support\*

The optional bypass facility allows the system to operate using the filters only during maintenance or malfunction of the dryer, thus avoiding any downtime.

### Filter support\*

This option allows two filters to be installed on the rear side of the dryer, reducing overall dimensions and installation costs.


\* Filters are not included in the option.



# THE SMART CHOICE FOR HIGH RELIABILITY

## Components

- 1 REFRIGERANT COMPRESSOR**  
driven by an electric motor, cooled using refrigerant fluid and protected against thermal overload.
- 2 REFRIGERANT CONDENSER**  
air-cooled and with a large exchange surface for high thermal exchange.
- 3 MOTOR-DRIVEN FAN**  
for the condenser cooling air flow.
- 4 AIR/REFRIGERANT EVAPORATOR**  
with high thermal exchange and low leakage rates.
- 5 CONDENSATE SEPARATOR**  
High-efficiency.

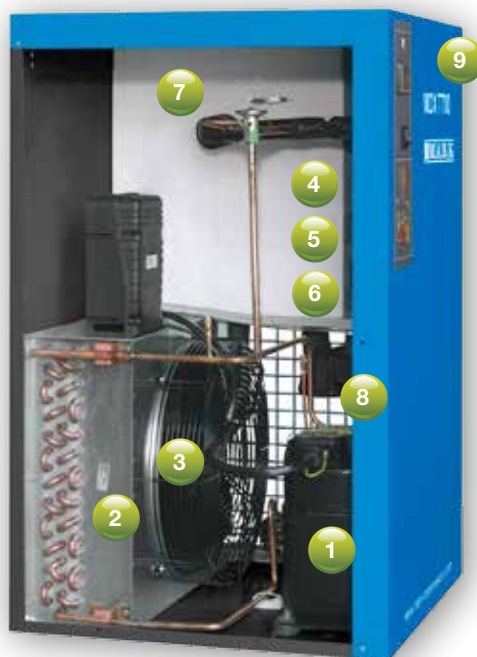

- 6 AIR-AIR EXCHANGER**  
with high thermal exchange and low load losses.
- 7 HOT GAS BYPASS VALVE**  
controls the refrigerant capacity under all load conditions preventing any formation of ice within the system.
- 8 AUTOMATIC DISCHARGE OF CONDENSATE**  
Energy saving and self adjusting, allows only moisture to discharge and prevents waste discharge of valuable compressed air.
- 9 CONTROL PANEL**  
indicating all relevant information

## Drying principle

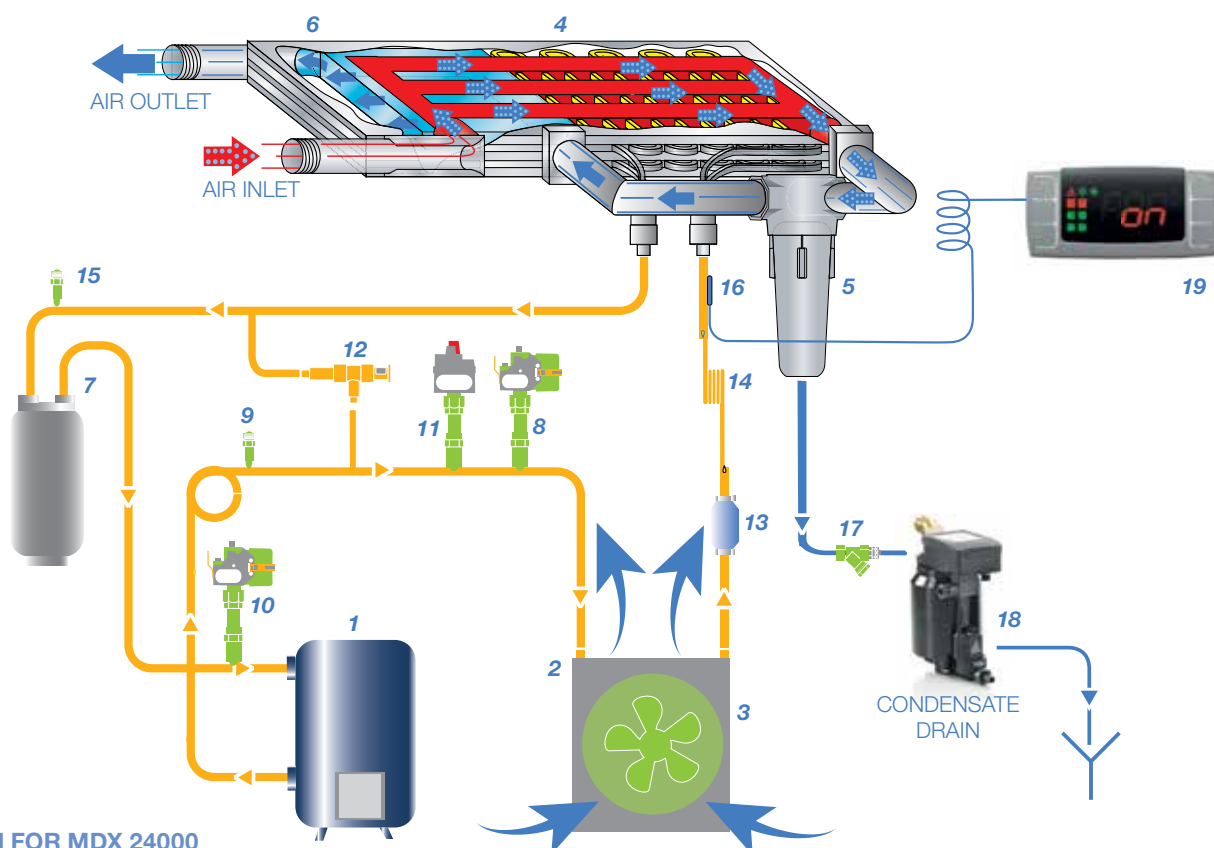


DIAGRAM FOR MDX 24000

- |  |                                |                                       |
|--|--------------------------------|---------------------------------------|
| 1. Refrigerant fluid compressor                | 7. Refrigerant fluid separator | 14. Capillary Tube                    |
| 2. Condenser                                   | 8. Maximum pressure switch     | 15. Service valve                     |
| 3. Motor driven fan                            | 9. Service valve               | 16. Dewpoint thermometer              |
| 4. Air/Refrigerant Evaporator                  | 10. Minimum pressure switch    | 17. Impurity collector                |
| 5. Condensate separator with a demister filter | 11. Fan pressure switch        | 18. Automatic discharge of condensate |
| 6. Air/air heat exchanger                      | 12. Hot gas bypass valve       | 19. PDP indicator                     |
|  | 13. Refrigerant fluid filter   |                                       |



# MDX 400 -84000 REFRIGERANT DRYERS



## »»» Technical data • According to ISO 7183 and Cagi Pneurop PN8NTC2

TYPE	Max. Working Pressure		Air Treatment Capacity			Motor Power		Inlet / outlet Connections	Dimensions			Weight	
	bar	psi	l/1'	m <sup>3</sup> /h	cfm	W	V/Hz/Ph	gas/DN	L	W	H	kg	refrigerant gas
<b>MDX 400</b>	16	232	350	21	12,4	130	230/50/1	3/4" M	350	500	450	19	R134a
<b>MDX 600</b>	16	232	600	36	21,2	164	230/50/1	3/4" M	350	500	450	19	R134a
<b>MDX 900</b>	16	232	850	51	30,0	190	230/50/1	3/4" M	350	500	450	20	R134a
<b>MDX 1200</b>	16	232	1.200	72	42,4	266	230/50/1	3/4" M	350	500	450	25	R134a
<b>MDX 1800</b>	16	232	1.825	110	64,4	284	230/50/1	3/4" M	350	500	450	27	R134a
<b>MDX 2400</b>	13	188	2.350	141	83,0	609	230/50/1	1" F	370	500	764	44	R404A
<b>MDX 3000</b>	13	188	3.000	180	106	673	230/50/1	1" F	370	500	764	44	R404A
<b>MDX 3600</b>	13	188	3.600	216	127	793	230/50/1	1 1/2" F	460	560	789	53	R404A
<b>MDX 4100</b>	13	188	4.100	246	145	870	230/50/1	1 1/2" F	460	560	789	60	R404A
<b>MDX 5200</b>	13	188	5.200	312	184	1.072	230/50/1	1 1/2" F	460	560	789	65	R404A
<b>MDX 6500</b>	13	188	6.500	390	230	1.190	230/50/1	1 1/2" F	580	590	899	80	R404A
<b>MDX 7700</b>	13	188	7.700	462	272	1.446	230/50/1	1 1/2" F	580	590	899	80	R404A
<b>MDX 10000</b>	13	188	10.000	600	353	1.319	400/50/3	2" F	735	898	962	128	R410A
<b>MDX 12000</b>	13	188	12.000	720	424	1.631	400/50/3	2" F	735	898	962	146	R410A
<b>MDX 15000</b>	13	188	15.000	900	530	1.889	400/50/3	2" F	735	898	962	158	R410A
<b>MDX 18000</b>	13	188	18.000	1.080	636	2.110	400/50/3	2" F	735	898	962	165	R410A
<b>MDX 24000</b>	13	188	24.000	1.440	848	3.900	400/50/3	3" F	1.020	1.082	1.535	325	R404A
<b>MDX 30000</b>	13	188	30.000	1.800	1.060	4.460	400/50/3	3" F	1.020	1.082	1.535	335	R404A
<b>MDX 35000</b>	13	188	35.000	2.100	1.237	5.550	400/50/3	3" F	1.020	1.082	1.535	350	R404A
<b>MDX 45000</b>	13	188	45.000	2.700	1.589	6.715	400/50/3	DN125	1.020	1.082	1.535	380	R404A
<b>MDX 50000</b>	13	188	50.000	3.000	1.766	6.800	400/50/3	DN125	1.020	2.099	1.535	550	R404A
<b>MDX 70000</b>	13	188	70.000	4.200	2.472	10.200	400/50/3	DN125	1.020	2.099	1.535	600	R404A
<b>MDX 84000</b>	13	188	84.000	5.040	2.966	12.300	400/50/3	DN125	1.025	2.099	1.535	650	R404A

### NOTES:

(1) Reference conditions:

- Operating pressure: : 7 bar (100 psi)
- Operating temperature : 35 °C
- Room temperature: : 25 °C
- Pressure dewpoint: : +3 °C +/- 1
- Available in different voltages and frequency

Limit conditions:

- Working pressure: 16 bar (232 psi) MDX 400-1800  
13 bar (188 psi) MDX 2400-84000
- Operating temperature: 55 °C
- Min/Max room temperature: +5 °C; 45 °C

Optional for MDX (400-1800):

- Bypass + filter support
- Filter support



## »»» Correction factor • for conditions differing from the project $K = A \times B \times C$

Room temperature	°C	25	30	35	40	45	Operating temperature	°C	30	35	40	45	50	55
	A	1,00	0,92	0,84	0,80	0,74		B	1,24	1,00	0,82	0,69	0,58	0,45
		1,00	0,91	0,81	0,72	0,62			1,00	1,00	0,82	0,69	0,58	0,49

Operation pressure	bar	5	6	7	8	9	10	11	12	13	14	15	16	
	C	0,90	0,96	1,00	1,03	1,06	1,08	1,10	1,12	1,13	1,15	1,16	1,17	
		0,90	0,97	1,00	1,03	1,05	1,07	1,09	1,11	1,12				

The new flow rate value can be obtained by dividing the current or real flow rate by the correction factor related to the real operation conditions.

## »»» Environmental friendly refrigerant gases

A key objective in the design of the MDX dryer was to deliver a product that offers performance, reliability and safety with the lowest possible environmental impact.

- Environmentally friendly thanks to the use of R134a, R404A and R410A gas.
- No impact on the ozone layer.
- R410A gas has exceptional properties:
  - Very low Global Warming Potential (GWP)
  - Energy saving by use of rotary refrigerant compressor




## MDX 400-84000 Refrigerant dryers

Part of a full range of  
Quality air products



- A high quality product offering you **technology you can trust**.
- Our products are **easy to use** and guarantee high **reliability**.
- Distributors are always nearby ensuring **availability** of both products and support.
- Choosing our high performance products entails a **partnership** that will boost your business.
- Safeguarding long-term productivity through optimal **serviceability** and use of original parts.



## Care. Trust. Efficiency.

### Care.

Care is what service is all about: professional service by knowledgeable people, using high-quality original parts.

### Trust.

Trust is earned by delivering on our promises of reliable, uninterrupted performance and long equipment lifetime.

### Efficiency.

Equipment efficiency is ensured by regular maintenance. Efficiency of the service organization is how Original Parts and Service make the difference.

© 2014, Mark. All rights reserved. All mentioned brands, product names, company names, trademarks and service marks are the properties of their respective owners. Our products are constantly being developed and improved. We thus reserve the right to modify product specifications without prior notice. Pictures are not contractually binding.

6999200153



Contact your local sales representative now!

[www.mark-compressors.com](http://www.mark-compressors.com)